rotronic


Datenblatt - Fiche technique - Data sheet 11.04.5603



ROLINE DisplayPort Kabel, DP ST - ST, 3,0m

ROLINE Câble DisplayPort DP M - DP M, 3,0m

ROLINE DisplayPort Cable, DP M - DP M, 3 m

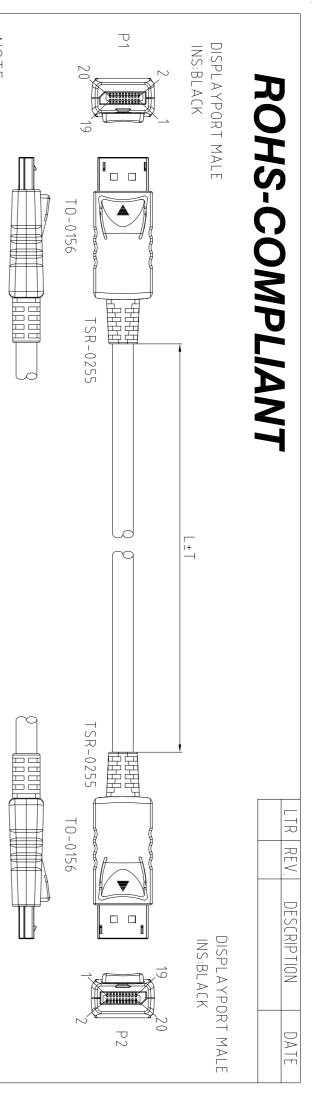

1.CABLE: UL-20276 [#30(7/0.1 T.C)×1P INS:FOAM-PE+D.W(7/0.1 T.C)+AL/MY

+Hot-melt Mylar] \times 5C + $\#30(7/0.1 \text{ T.C})\times4\text{C INS:Polyethylene+AL/MY+}$

B.D(85%) PVC JACKET; OD:6.5±0.2mm COLOR:MATT BLACK(NK-K01)

P1 & P2: DISPLAYPORT 20P MALE W/PCB & LATCH CONTACT:15u"

SHELL:Ni-PLATED

SHIELD: INNER MOLD MUST BE WRAPPED COPPER TO CONNECTOR SHELL & CABLE BRAID

.HOOD:ASS'Y TYPE, PLASTIC HOOD COLOR:BLACK(NK-K01)

ELECTRICAL TEST:

(1)100% OPEN SHORT & MIS WIRE TEST.

(2)CONTACT RESISTANCE 3 ohm Max

							00 W 01
Dwg No. 200-1161 REV:A Sheet.1/2	E11 9 1	NO.	P/N L(mm) T(mm) PCS/CTN BAR CODE	L(mm) T(P/N	DWG	
NONE Units		20 7611990186266	30 20		11.04.5602	200-1161-1 11.04.5602 2000	
App'd Customer: T-RAG	_ Chek		20		11.04.0000	7 - 1 - 0 - 1	
CUSTOMET P/N	FANNIE 01/14/09' LUSTOMET P/N	7611000186273	30 70		11 0/ 5603	200_1161_2 11 0/ 5602 3000	
		/611990186280 Draw	10	5000	11.04.5605	200-1161-3 11.04.5605 5000 50	
DISPLAYDORT ASS'Y CARLE	.005 .05		2				
Title		BEL.	- BAR CODE LA	R (ARD -	AG + HEADE	PC / POLY B	PACKING:EACH PC / POLY BAG + HEADER CARD + BAR CODE LABEL.
Rotroffic co., LID.	. X .015 .30					(4)HI_POT DC300V	(4)HI-PC
	Tolerance Inch M/M				I ANCE TOP	(3) INSULATION RESISTANCE TOP ONIN MIN.	(3) \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
					H ^ Z C 10 N	> HION DIOIO	/ _ / _ / / /


Engr

Dwg No. 200-1161

REV:A

Sheet.2/2

Scale NONE Units M/M Projection +

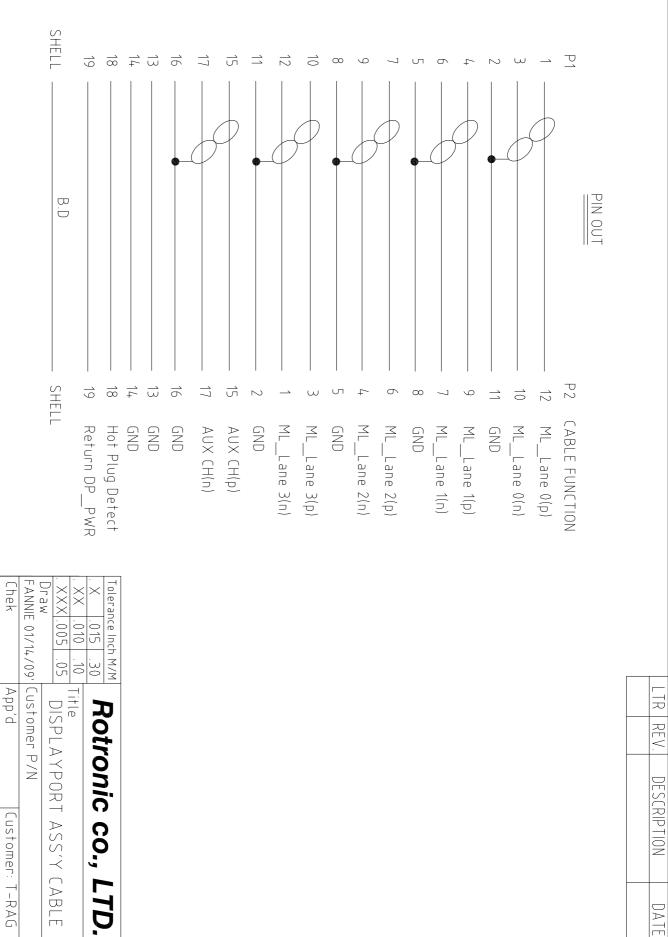

DATE